


## HELICAL NYLON FLOWMETERS Serie BR

<b>BR-025</b> 1.1/4"BSP	<b>BR-020</b> 1"BSP	<b>BR-012</b> 3/4"BSP	<b>BR-008</b> 1/2"BSP	<b>BR-004</b> 1/4"BSP
----------------------------	------------------------	--------------------------	--------------------------	--------------------------



### HELICAL ROTATING SENSOR

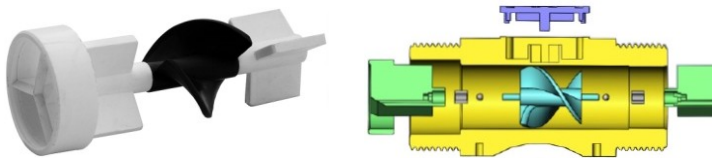


The helical flow sensor is a special positive displacement system with a very favorable low pressure drop behavior, therefore perfectly suited for flow measurements for low and high viscosity liquids.

The special developed mechanical helical sensing system provides wide measuring ranges, high accuracy and high resolution they are the excellent choice for water, laminating systems, painting systems, adhesive dispensing systems, as well as batching systems for various viscous liquids.

MATERIALS	ELECTRICAL DATA	WIRING
-----------	-----------------	--------

Body: Nylon PA66 + 30% GF (Glass Fiber)  
 Helical rotor: Nylon PA66  
 Shaft: S.S. AISI316  
 Ball: S.S. AISI304 with hard coating  
 Support: POM  
**Optional**  
 Body and Helical rotor in Stainless steel

**Connections**  
 3 wires cable lenght 20cm  
**Output**  
 NPN Open-Collector pulses (5 to 24Vdc)  
**Optional**  
 Reed switch 2 wire  
 Display totalizer/meter/4-20mA battery/24Vdc



MODELS	Size BSP male	Range l/min	PPL approx	Accuracy wide range	Repeatability standard	Temperature range	Pressure max	Viscosity range
BR-004	1/4"	0.5 ÷ 6	3900	±1%	0,1%	-20°...+80°C	10 bar	1 ÷ 106 mm <sup>2</sup> /s
BR-008	1/2"	2 ÷ 30	950	±1%	0,1%	-20°...+80°C	10 bar	1 ÷ 106 mm <sup>2</sup> /s
BR-012	3/4"	8 ÷ 90	204	±1%	0,1%	-20°...+80°C	10 bar	1 ÷ 106 mm <sup>2</sup> /s
BR-020	1"	15 ÷ 150	84	±1%	0,1%	-20°...+80°C	10 bar	1 ÷ 106 mm <sup>2</sup> /s
BR-025	1.1/4"	18 ÷ 180	49	±1%	0,1%	-20°...+80°C	10 bar	1 ÷ 106 mm <sup>2</sup> /s

It is possible to use the flowmeters with lower flow rates by adjusting and recalibrating the PPLs

DIMENSIONS	Models	L1	H1	Weight	Thread
	BR-004	60	26.5	0.01 Kg	1/4"BSP
	BR-008	70	32	0.04 Kg	1/2"BSP
	BR-012	87	37	0.06 Kg	3/4"BSP
	BR-020	95	42,5	0.08 Kg	1"BSP
	BR-025	101.3	49	0.12 Kg	1.1/4"BSP

Never use compress air to test the flowmeter